


TECHNICAL SPECIFICATION | CLASSIC RANGE



NAME	GU10 5 Watt 400 Lumens 2500K	CANDLE 2 Watt 170 Lumens 2500K	CANDLE 4 Watt 350 Lumens 2500K	LURRA 3 Watt 240 Lumens 2200K
Product Code	GU10-5W- 2500K-RA80	CAND-2W- 2500K-E14- NT	CAND-2W- 2500K-E14- NT	T38-3W-2200K-E14-NT
VOLTS	240V	240V	240V	240V
WATTS	5W	1.6W	3.2W	3.2W
CRI:	CRI: >80	CRI: >90	CRI: >90	CRI: >90
BASE	GU10	E14/B15	E14/B15	E26/E27/B22
DIMMABLE	Dimmable	Dimmable	Dimmable	Dimmable
LUMENS	400 Lumens	170 Lumens	350 Lumens	240 Lumens
LUMENS/WATT	80 Lumens/Watt	105 Lumens/Watt	109 Lumens/Watt	80 Lumens/Watt
COLOUR TEMPERATURE	Warm White/2500K	Warm White/2500K	Warm White/2500K	Warm White/2500K
MERCURY FREE	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg
SWITCH CYCLES	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000
AVERAGE LIFESPAN	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs
WATT REPLACEMENT	Watt Replacement: 40W	Watt Replacement: 25W	Watt Replacement: 35W	Watt Replacement: 40W
BULB DIMENSIONS	Ø50mm x L55mm	Ø35mm x L100mm	Ø35mm x L100mm	Ø38mm x L108mm
WARM UP TIME	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant
WORKING TEMPERATURE	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C
WARRANTY	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years
DIMMING	Leading/Trailing Edge	Trailing Edge	Trailing Edge	Trailing Edge
GLASS	NA	Clear	Clear	Tinted
TYPE	GU10	C35	C35	T38
INPUT VOLTAGE	110-240V	110-240V	110-240V	110-240V
IP	IP45	IP54	IP54	IP54
BEAM ANGLE	40	360	360	360
CERTIFICATES	CE, RoHSw	CE, RoHS,	CE, RoHS,	CE, RoHS,

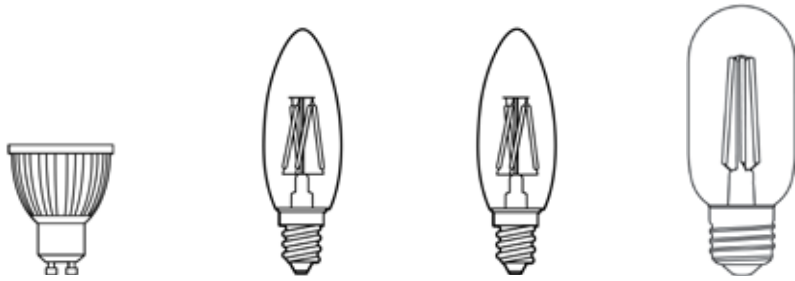

4W PLUTO 4 Watt 350 Lumens 2500K	3W CROWN 3 Watt 320 Lumens 2500K	6W GLOBE 6 Watt 650 Lumens 2500K
PLUT-4W- 2500K-E14- NT	CRWN-3W-2500K-E27-NT	GLOB-6W- 2500K-E27- NT
240V	240V	240V
3.2W	3.2W	6W
CRI: >90	CRI: >90	CRI: >90
E14/B15	E26/E27/B22	E26/E27/B22
Dimmable	Dimmable	Dimmable
350 Lumens	320 Lumens	650 Lumens
109 Lumens/Watt	80 Lumens/Watt	108 Lumens/Watt
Warm White/2500K	Warm White/2500K	Warm White/2500K
Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg
Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000
Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs
Watt Replacement: 35W	Watt Replacement: 40W	Watt Replacement: 60W
Ø45mm x L80mm	Ø60mm x L108mm	Ø60mm x L108mm
Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant
Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C
Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years
Trailing Edge	Trailing Edge	Trailing Edge
Clear	Clear	Clear
G45	A60	A60
110-240V	110-240V	110-240V
IP54	IP54	IP54
360	360	360
CE, RoHS,	CE, RoHS,	CE, RoHS