



TECHNICAL SPECIFICATION | FEATURE RANGE

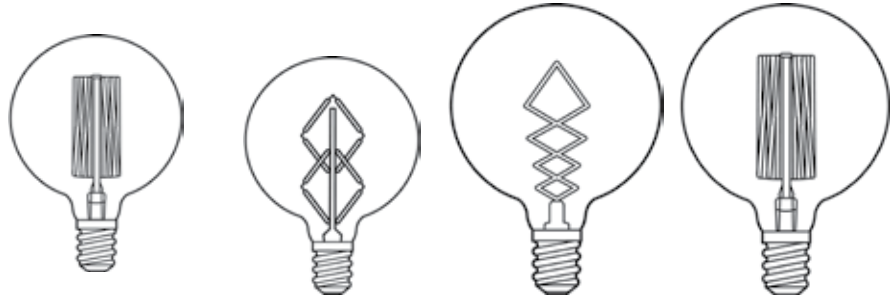

NAME	ELVA 6 Watt 480 Lumens 2200K	EROS 4 Watt 400 Lumens 2200K	ARIES 6 Watt 600 Lumens 2200K	GAIA 6 Watt 480 Lumens 2200K
Product Code	ELVA-6W- 2200K-E27- NT	EROS-4W-2200K-E27-T	AURA-6W- 2200K-E27- NT	GAIA-6W- 2200K-E27-T
VOLTS	240V	240V	240V	240V
WATTS	6W	4W	6W	6W
CRI:	CRI: >90	CRI: >90	CRI: >90	CRI: >90
BASE	E26/E27/B22	E26/E27/B22	E26/E27/B22	E26/E27/B22
DIMMABLE	Dimmable	Dimmable	Dimmable	Dimmable
LUMENS	480 Lumens	400 Lumens	600 Lumens	480 Lumens
LUMENS/WATT	80 Lumens/Watt	100 Lumens/Watt	100 Lumens/Watt	80 Lumens/Watt
COLOUR TEMPERATURE	Warm White/2200K	Warm White/2200K	Warm White/2200K	Warm White/2200K
MERCURY FREE	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg
SWITCH CYCLES	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 20,000
AVERAGE LIFESPAN	Average Lifespan: 20,000hrs	Average Lifespan: 20,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs
WATT REPLACEMENT	Watt Replacement: 50W	Watt Replacement: 40W	Watt Replacement: 50W	Watt Replacement: 50W
BULB DIMENSIONS	Ø95mm x L140mm	Ø95mm x L140mm	Ø125mm x L175mm	Ø125mm x L175mm
WARM UP TIME	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant
WORKING TEMPERATURE	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C
WARRANTY	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years
DIMMING	Trailing Edge	Trailing Edge	Trailing Edge	Trailing Edge
GLASS	Clear	Clear	Clear	Tinted
BASE	Gold Cap	Gold Cap	Gold Cap	Gold Cap
TYPE	G95	G95	G125	G125
INPUT VOLTAGE	110-240V	110-240V	110-240V	110-240V
IP	IP54	IP54	IP54	IP54
BEAM ANGLE	360	360	360	360
CERTIFICATES	CE, RoHS,	CE, RoHS,	CE, RoHS,	CE, RoHS,

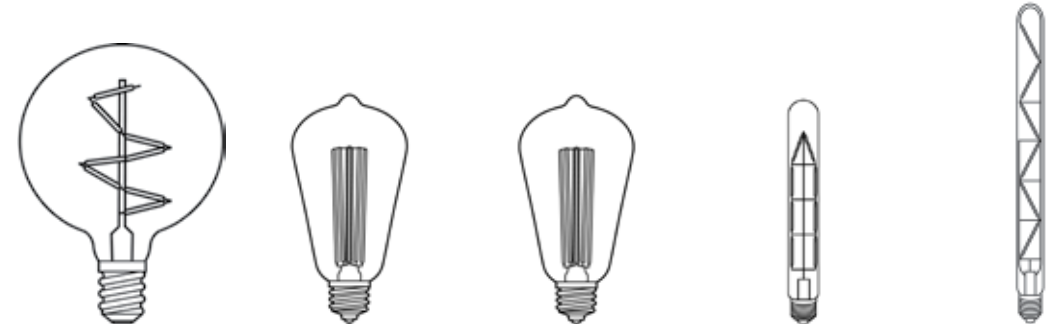

ZION 6 Watt 480 Lumens 2200K	SQUIRREL CAGE 4 Watt 320 Lumens 2200K	SQUIRREL CAGE DEMI 3 Watt 240 Lumens 2200K	TOTEM 210 mm 3 Watt 240 Lumens 2200K	TOTEM 300 mm 3 Watt 240 Lumens 2200K
ZION-6W- 2200K-E27-T	SQCG-4W- 2200K-E27-T	SQCG-3W- 2200K-E27-T	TOTM-3W- 2500K-E27- NT	TOTM-3W- 2500K-E27- NT
240V	240V	240V	240V	240V
6W	4W	3W	3W	4W
CRI: >90	CRI: >90	CRI: >90	CRI: >90	CRI: >90
E26/E27/B22	E26/E27/B22	E26/E27/B22	E26/E27/B22	E26/E27/B22
Dimmable	Dimmable	Dimmable	Dimmable	Dimmable
440 Lumens	320 Lumens	240 Lumens	280 Lumens	280 Lumens
73 Lumens/Watt	80 Lumens/Watt	80 Lumens/Watt	70 Lumens/Watt	70 Lumens/Watt
Warm White/2200K	Warm White/2200K	Warm White/2200K	Warm White/2500K	Warm White/2500K
Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg	Mercury Free = 0.0mg
Switch Cycles: 20,000	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000	Switch Cycles: 30,000
Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 20,000hrs	Average Lifespan: 30,000hrs	Average Lifespan: 30,000hrs
Watt Replacement: 50W	Watt Replacement: 40W	Watt Replacement: 25W	Watt Replacement: 30W	Watt Replacement: 30W
Ø125mm x L175mm	Ø64mm x L140mm	Ø64mm x L140mm	Ø30mm x L210mm	Ø30mm x L300mm
Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant	Warm Up Time: Instant
Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C	Working Temperature: -20°C to 40°C
Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years	Warranty: 2 Years
Trailing Edge	Trailing Edge	Trailing Edge	Trailing Edge	Trailing Edge
Tinted	Tinted	Tinted	Tinted	Tinted
G125	Squirrel Cage	Squirrel Cage	T30	T30
110-240V	110-240V	110-240V	110-240V	110-240V
IP54	IP54	IP54	IP54	IP54
360	360	360	360	360
CE, RoHS,	CE, RoHS,	CE, RoHS,	CE, RoHS,	CE, RoHS,